

# On the inadequacy of the logistic map for cryptographic applications

David Arroyo, Gonzalo Alvarez, Veronica Fernandez

**Abstract**—This paper analyzes the use of the logistic map for cryptographic applications. The most important characteristics of the logistic map are shown in order to prove the inconvenience of considering this map in the design of new chaotic cryptosystems.

## I. INTRODUCTION

Chaotic cryptography has been an important research area during the last two decades. The properties of chaotic systems have been used in very different ways to build new cryptosystems. All of those proposals can be classified into two big families, which are analog chaos-based cryptosystems and digital chaos-based cryptosystems. The first type of chaotic cryptosystems is based on the chaotic synchronization technique [1], whereas digital chaotic cryptosystems are based on one or more chaotic maps in such a way that the secret key is either given by the control parameters and the initial conditions or determines those values. The scope of this paper is related to a subclass of the last type of chaotic cryptosystems. More specifically, the present work deals with the underlying problems of those digital chaotic cryptosystems based on the logistic map. The logistic map is the most widely used in the designing of new digital chaotic cryptosystems [2]–[25]. Some of these proposals have been totally or partially cryptanalyzed as a consequence of not fully considering the dynamical characteristics of the logistic map [26]–[35]. This paper analyzes these dynamical characteristics and explains the problems of their application in the context of chaotic cryptography.

## II. CHAOTIC MAPS AND CRYPTOGRAPHY

The major task of cryptography is to ensure the secrecy of information. To do so, encryption methods have to be created so the message or plaintext is transformed into an encrypted message or ciphertext. The transformation procedure depends on an external parameter called key such that it is only possible to recover the original message if that key is known. As it was required by Kerckhoff [36, p. 14], the security of a cryptosystem should depend only on its key. It is also necessary that the ciphertext generated by the encryption procedure does not contain enough information to guess either the plaintext or the value of the key, which also forces ciphertexts associated to very similar values of the secret key to be very different from

each other. This is the reason why chaotic maps have captured the attention of cryptographers and many chaotic cryptosystems, i.e., cryptosystems based on chaotic maps have been proposed. The dynamics of chaotic maps highly depends on an external value or set of values and the initial state of the system, which reminds the dependency of the cryptosystem on the secret key. Chaotic maps have also a noise-like behavior that can be used to encrypt information through substitution or masking processes. The next section introduces the above mentioned dynamical properties of chaotic maps and their special behavior.

## III. DISCRETE DYNAMICAL SYSTEMS

A discrete dynamical system [37] is defined by a difference equation

$$x \mapsto g(x), \quad (1)$$

where  $x, g(x) \in U \subset \mathbb{R}^n$ . Discrete dynamical systems are usually studied by means of their temporal evolution. The temporal evolution of a discrete dynamical system is given by the sequence of points

$$\{x_0, x_1, \dots, x_n\}, \quad (2)$$

where  $x_0, x_n \in U$  and  $x_n$  is defined by

$$x_k = g(x_{k-1}), \quad (3)$$

for  $k = 1, 2, \dots, n$ . This temporal evolution is usually called orbit of the dynamical system and it is going to be noted as  $\gamma(x_0)$ .

It is also possible that the dynamics of the discrete system depends on an external parameter or set of parameters  $\mu \in V \subset \mathbb{R}^p$ . In this case, the time evolution is

$$x_{k+1} = g(\mu, x_k), \quad (4)$$

and the orbit associated to a certain initial condition is

$$\gamma(\mu, x_0) = \{x_0, x_1, \dots, x_n\}. \quad (5)$$

The next task is to categorize the influence of the initial condition and the parameter or set of parameters on the time evolution of the dynamical system. This goal does not require an analytical determination of the orbit, since a qualitative analysis gives enough information. The qualitative study is based on the concept of *invariant set*. Let  $\Gamma$  be a subset of  $U \subset \mathbb{R}^n$ .  $\Gamma$  is an invariant set of  $x_{k+1} = g(\mu, x_k)$  if for any  $x_0 \in \Gamma$  it is satisfied that  $x_k \in \Gamma$  for any  $k \in \mathbb{N} \cup \{0\}$ . Indeed, the determination of the invariant sets associated to a discrete dynamical system is enough information to ascertain the kind

David Arroyo, Gonzalo Alvarez and Veronica Fernandez are with Instituto de Física Aplicada, Consejo Superior de Investigaciones Científicas, Serrano 144, 28006 Madrid, Spain.  
e-mail: {david.arroyo, gonzalo, veronica.fernandez}@iec.csic.es

of orbit determined by  $x_0$  and  $\mu$ . There are three types of invariant sets:

- 1) *Fixed point*. The invariant set  $\Gamma$  is a fixed point when it contains only one point  $x^*$  such that if  $x_0 = x^*$ , then  $x_k = x^*$  for any  $k \in \mathbb{N} \cup \{0\}$ .
- 2) *Periodic orbit*. In this case, the invariant set is a set of  $p$  points  $\{x_1, x_2, \dots, x_p\}$  where  $x_i = g(\mu, x_{i-1})$  and  $x_1 = g(\mu, x_p)$ .
- 3) *Strange attractor*. The main characteristics of this kind of invariant set are:
  - *Sensitivity with respect to the initial conditions*. The orbits associated to two arbitrarily close initial conditions are totally different.
  - *Sensitivity with respect to the external parameter or set of parameters*. Two orbits generated from the same initial condition and two arbitrarily close set of values for the external parameter(s) are totally different.
  - *A non-integer dimension*. A strange attractor can not be represented neither by a curve nor by a surface. For that reason, a new dimension concept is introduced. This is named *Haussdorf dimension*.
  - *Ergodicity*. The orbit associated to a certain initial condition included in an small interval  $I \subset \Gamma$  covers the whole invariant set. Moreover, for other small interval  $J \subset \Gamma$  there exists a point in  $I$  such that it determines an orbit that is partially included in the interval  $J$ . Hence, the orbit generated from any initial condition in the invariant set is as close to any point inside the strange attractor as desired.

Those discrete dynamical systems possessing the last type of invariant set show a very special behavior when the initial condition and the parameter(s) are selected to be inside the strange attractor. This behavior is called chaotic and so these discrete dynamical systems are named *chaotic discrete dynamical systems or chaotic maps*. Finally, the chaotic behavior is the reason why chaotic maps are so attractive for cryptographers. Indeed, the sensitivity of chaotic maps with respect to the initial conditions and the control parameter(s) reminds the dependency of cryptosystems with respect to the secret key. Furthermore, the ergodicity property of chaotic maps implies that the probability distribution function associated to the chaotic orbits is independent of the initial condition and parameter or parameters values, and it also indicates that two orbits in close proximity in a certain time lead to very different behaviors after a transient time. In other words, the ergodic behavior of chaotic maps could be used as the support of both confusion and diffusion processes required by a secure cryptosystem.

#### IV. THE LOGISTIC MAP

The logistic map is a chaotic map and, having in mind the previous comments, it can be considered for the design of new digital chaotic cryptosystems. However, the specific characteristics of the logistic map make its extensive use not advisable with that purpose. In order to clarify this assertion, the dynamical characteristics of the logistic map are going

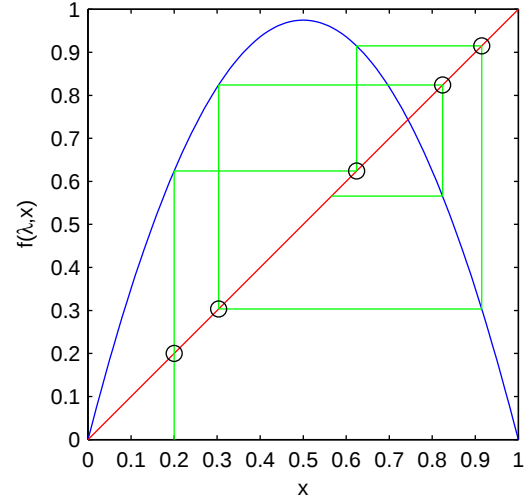


Fig. 1. Iteration function associated to the logistic map.

to be thoroughly analyzed through the paper. First of all, the logistic map is defined by the next equation

$$x \mapsto f(\lambda, x) = \lambda x(1 - x), \quad (6)$$

where  $f(\lambda, x) : U \rightarrow U$ ,  $U = [0, 1]$ ,  $\lambda \in V = [0, 4]$  and  $x_n \in U$ . Figure 1 illustrates the iteration process to generate the orbit of the logistic when the initial condition  $x_0$  is equal to 0.2 and  $\lambda = 3.9$ . On the other hand, the function  $f(\lambda, x)$  reaches a maximal value for  $x = x_c = 0.5$  and it is monotonically increasing for  $x < x_c$  and monotonically decreasing for  $x > x_c$ . In other words, the logistic map is a *unimodal map*.

The qualitative analysis of the logistic map can be carried out by the study of its bifurcation diagram. The bifurcation diagram represents the asymptotic behavior of a discrete dynamical system. It is calculated iterating the iteration function linked to the dynamical system for a sufficiently large set of values of the control parameter(s) and a certain initial condition. In the case of unimodal maps, the selected initial condition is usually the critical point. Therefore, to calculate the bifurcation diagram of the logistic map, Eq. (6) is iterated from  $x_0 = 0.5$  for different values of  $\lambda$ . After a number of transient iterations, and for each considered value of  $\lambda$ , a long enough orbit is recorded and subsequently plotted. Fig. 2 has been generated according to this procedure. A detailed analysis of this bifurcation diagram leads to the following conclusions about the logistic map:

- It has an asymptotic stable fixed point equal to 0 for  $\lambda \in (0, 1)$ .
- It has an asymptotic stable fixed point equal to  $\frac{\lambda-1}{\lambda}$  for  $\lambda \in (1, 3)$ .
- For  $\lambda \in (3, 3.57)$  there exist periodic attractors of period  $2^m$  for  $m = 1, 2, \dots$ . This region is known as the doubling-period cascade.
- For  $\lambda > 3.57$  the behavior of the logistic map is chaotic interrupted by small regions where the existing attractor is periodic and not strange. These regions are known as periodic windows.

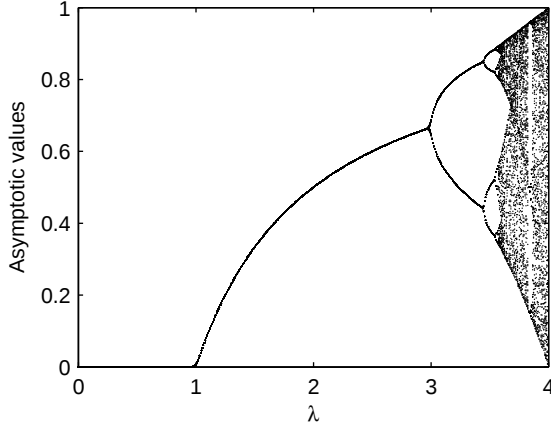


Fig. 2. Bifurcation diagram of the logistic map.

#### A. Considerations about the key space determined by the logistic map

In this section it is assumed we are dealing with a chaotic cryptosystem whose secret key contains the control parameter  $\lambda$  [2], [5]–[7], [9], [20]. As it was indicated in the previous section, if a chaotic behavior is demanded for the logistic map,  $\lambda$  is required to be greater than 3.57. Nonetheless, this is a necessary but not sufficient condition for the chaoticity of the logistic map, as it was emphasized above and as Fig. 3 shows. This graphic underlines a very important problem when selecting proper values for  $\lambda$  in the case of the logistic map. The existence of periodic windows must be avoided, since otherwise the ciphertext would not be random-like and resulting in an inefficient encryption procedure. This problem has been reported and exploited for cryptanalysis purposes in [27], [33].

The Lyapunov exponent (LE) [38] is a very useful tool to determine if a certain value of  $\lambda$  makes the logistic map evolve chaotically. It is calculated using the following equation

$$LE(\lambda) = \lim_{N \rightarrow \infty} \frac{1}{N} \sum_{k=0}^{N-1} \ln |f(\lambda, x)'(x_k)|. \quad (7)$$

Fig. 4 depicts the LE for the logistic map. Those values of  $\lambda$  so the LE is greater than zero are the ones to be selected for cryptographic issues, since they imply a chaotic behavior. However, the LE does not grab all the periodic windows, as it was emphasized in [38]. Therefore, it is advisable to assess the different values of  $\lambda$  using other entropy measures as the conditional entropy [39], the Wavelet-Entropy [40] or the discrete entropy [41]. Anyway, the key space related to the control parameter  $\lambda$  undergoes an important stretch due to the existence of periodic windows, which also makes more difficult the key selection by the users and thus the cryptosystem implementation. This last fact should be avoided when designing a new cryptosystem [42, Rule 3], and so the logistic map should be replaced by another chaotic map that makes easier either the key selection or the hardware implementation. From this point of view, Piecewise Linear Maps [43] should be considered as an alternative to the logistic map. Indeed,

Piecewise Linear Maps have a Lyapunov exponent always positive which implies that their bifurcation diagram does not include any periodic window, and they are the simplest chaotic system from the implementation viewpoint.

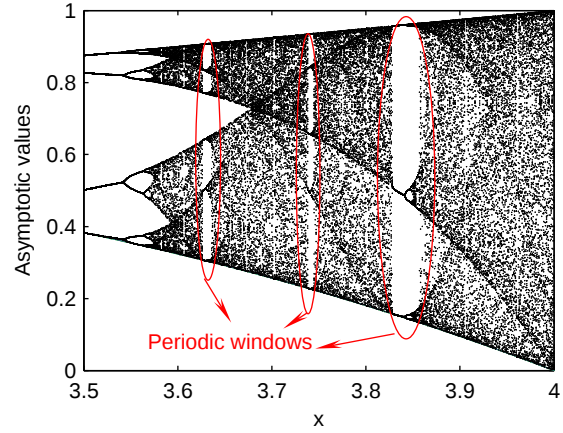


Fig. 3. Bifurcation diagram of the logistic map.

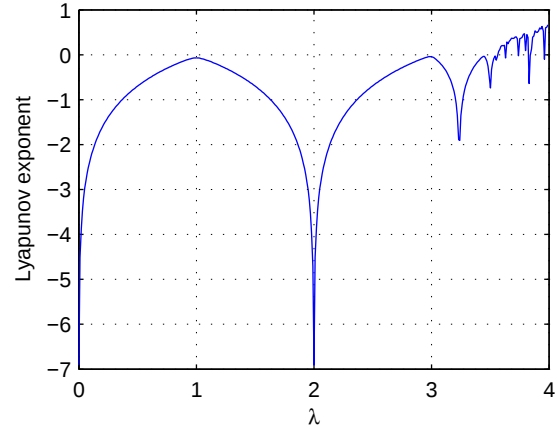


Fig. 4. Lyapunov exponent for the logistic map.

#### B. Considerations about the ergodicity of the logistic map

The performance of the Baptista's type chaotic cryptosystems [2], [5]–[7], [10], [13], [14], [24] depends on the capacity of the logistic map of generating orbits with a uniform probability distribution function. Indeed, Baptista's cryptosystem divides the phase space of the logistic map into a number of subintervals equal to the cardinality of the alphabet associated to the messages to be encrypted. In this fashion, each interval is associated to a character or component of the input space. Each time a plain character is going to be encrypted, the logistic map is iterated using the value of  $\lambda$  included in the secret key until the orbit lands on the interval linked to the plain character. As a result, the efficiency of the encryption process requires that the probability of landing in a subinterval to be uniform. This is the reason why the subintervals associated to the plain alphabet in [2] are placed in  $[0.2, 0.8]$  instead of  $[0, 1]$ . Nevertheless, if the probability density distribution of

the logistic map is analyzed (Fig. 5), one can conclude that the most visited places of the phase space of the logistic map are those closer to the extremes [27, p. 174], which implies that the encryption speed is very slow. Again, it is highly advisable to replace the logistic map by another map with uniform probability distribution function.

### C. Considerations about the orbit of the logistic map as ciphertext

A very important step in the design of a cryptosystem consists in deciding what is going to be the ciphertext. Indeed, chaotic cryptosystems transform the input information according to a chaotic orbit and the resulting ciphertext can not contain enough information to guess either the plaintext or the secret key. If the ciphertext contains values of the chaotic orbit it might be possible to infer the value of the control parameter. This happens with the cryptosystems described in [15] and in [20]. In [20] the ciphertext is simply the result of adding the plaintext to a chaotic orbit. Therefore, it is possible to get the chaotic orbit by a known-plaintext attack and, after that, estimate the value of the control parameter using Eq. (6) [33]. Even if the ciphertext is obtained by a random sampling of a chaotic orbit as in [15], it is possible to estimate the value of the control parameter. As Fig. 1 informs, the maximum value of the iteration function of the logistic map is reached for  $x_n = 0.5$ , which implies that the maximum possible value contained in an orbit is  $\lambda/4$ . As a result, if one has access to a sufficiently large sample of ciphertext derived from the cryptosystem described in [15], then one can estimate the value of  $\lambda$  using the maximum value contained in that portion of ciphertext. Since this kind of problem is a consequence of the logistic map having a maximum value dependent on the control parameter, any chaotic map showing this property is also equally vulnerable. This is the case of the Mandelbrot map and the tent map, which are also unimodal maps with either a minimum or maximum value dependent on the control parameter value. In [44] this feature is used to cryptanalyze the cryptosystem described in [45], which it is based on the tent map instead of the logistic map.

### D. Considerations about the symbolic dynamics of the logistic map

The logistic map is an unimodal map whose critical point is independent of the control parameter value. A first consequence of this fact is that it is possible an attack similar to that described in [27]. This attack is carried out on the Baptista's cryptosystem and is based on the theory of symbolic dynamics applied to unimodal maps [46]. The symbolic sequence associated to an orbit of an unimodal map is a binary sequence obtained by comparing each value of the orbit to the value of the critical point. Let  $x_k$  be a value of the orbit and  $x_c$  be the value of the critical point. The symbol corresponding to  $x_k$  is  $b_k$  and it is given by

$$b_k = \begin{cases} 0 & \text{if } x_k < x_c, \\ 1 & \text{if } x_k \geq x_c, \end{cases} \quad (8)$$

In [27] it is explained how a known-plaintext attack can be used to reconstruct a symbolic sequence associated to the

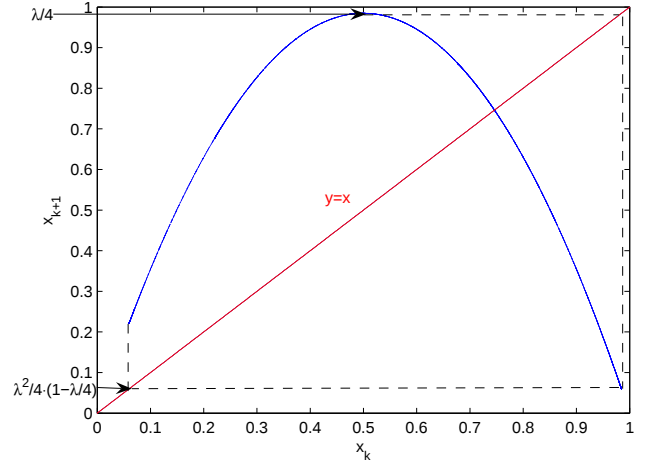


Fig. 6. Return map of the logistic for  $\lambda = 3.9384739$ .

secret value of  $\lambda$ . This symbolic sequence can be used to estimate either the initial condition or the control parameter that were employed to generate it [34], [47]. A way to avoid this problem is to use another map with a critical point dependent on the value of the secret key or a non-unimodal chaotic map.

### E. Considerations about the return map

When observing a dynamical system, a discrete time sequence is obtained. Let  $\{x_k\}$  be the sequence resulting of the mentioned observation process. The relationship between two consecutive values of this discrete time sequence is called *return map* and it can be used to guess some characteristics of the underlying dynamical system. Fig. 6 shows the return map of the logistic map, which provides enough information to get the value of the control parameter. As an example, in Fig. 6 the return map for  $\lambda = 3.9384739$  is depicted, showing that for a certain value of the control parameter the return map is defined in an interval whose minimum and maximum bounds are  $\lambda^2/4 \cdot (1 - \lambda/4)$  and  $\lambda/4$  respectively. This means that the control parameter can be obtained through the return map, as for example was done in [35], where a chosen ciphertext attack on the Baptista's cryptosystem is used to get a discretized return map and consequently estimate the value of the control parameter. Therefore, it is advisable to look for a chaotic map with a return map independent of the value of the control parameter or parameters and with  $x_{k+1}$  being the image of any  $x_k$  contained in the phase space.

### F. Considerations about the statistical complexity of the logistic map

As detailed in [42, Table 1], another important feature of chaotic maps is their structure complexity. Chaotic maps are described mathematically in a very simple way but their behavior is very complex. The complexity of any system can be measured by using statistical tools [48]. In Fig. 7 appears the Jensen-Tsallis statistical complexity [48] of the logistic map versus the control parameter. It shows how the



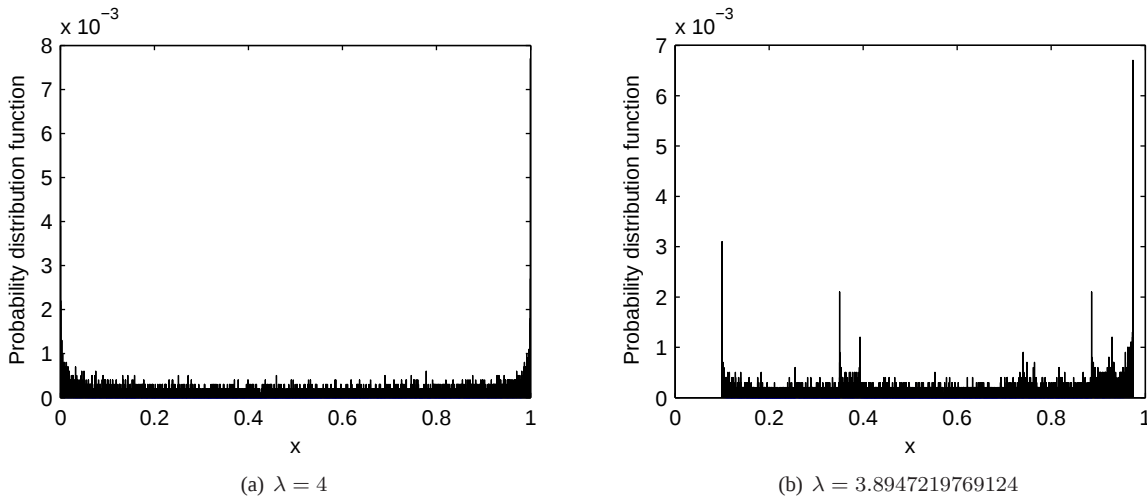


Fig. 5. Probability distribution function of the logistic for different values of the control parameter.

statistical complexity is very related to the value of the control parameter in the chaotic region. In fact, the complexity is almost a bijective application of the control parameter. This is something that could be exploited by a cryptanalyst and thus it is better to use a chaotic map with a non-bijective relationship between the statistical complexity and the control parameter.

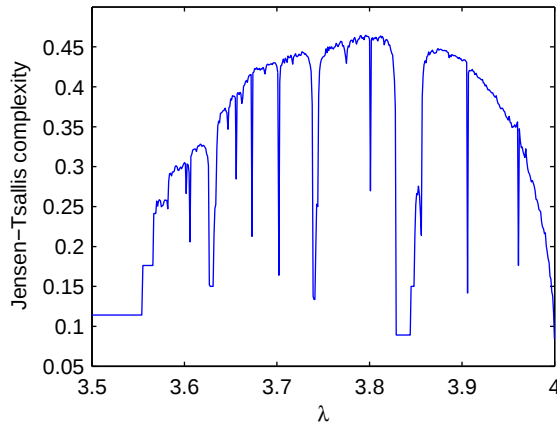


Fig. 7. Statistical complexity Jensen-Tsallis of the logistic map for different values of  $\lambda$ .

## V. CONCLUSIONS

In this paper the logistic map has been thoroughly analyzed and many disadvantages of its application for cryptographical issues has been emphasized. The logistic map is an unimodal map with an associated non-uniform probability distribution function, which possesses a critical point independent of the value of the control parameter and whose statistical complexity decreases as the control parameter increases. For all these reasons, the generalized use of the logistic map for the design of new cryptosystems has to be discouraged, being Piecewise Linear Maps a good alternative.

## ACKNOWLEDGMENT

The work described in this paper was supported by *Ministerio de Educación y Ciencia of Spain*, research grant SEG2004-02418, *Ministerio de Ciencia y Tecnología of Spain*, research grant TSI2007-62657 and *CDTI, Ministerio de Industria, Turismo y Comercio of Spain* in collaboration with Telefónica I+D, Project SEGUR@ with reference CENIT-2007 2004.

## REFERENCES

- [1] L. Pecora and T. Carroll, "Synchronization in chaotic systems," *Phys. Rev. Lett.*, vol. 64, no. 8, pp. 821–824, 1990.
- [2] M. S. Baptista, "Cryptography with chaos," *Phys. Lett. A*, vol. 240, no. 1-2, pp. 50–54, 1998.
- [3] L. Kocarev and G. Jakimoski, "Logistic map as a block encryption algorithm," *Physics Letters A*, vol. 289, pp. 199–206, 2001.
- [4] G. Jakimoski and L. Kocarev, "Chaos and Cryptography: Block Encryption Ciphers Based on Chaotic Maps," *IEEE Transactions on Circuits and Systems-I: Fundamental Theory and Applications*, vol. 48, no. 2, pp. 163–169, 2001.
- [5] W. Wong, L. Lee, and K. Wong, "A modified chaotic cryptographic method," *Comput. Phys. Comm.*, vol. 138, pp. 234–236, 2001.
- [6] K. W. Wong, "A fast chaotic cryptographic scheme with dynamic look-up table," *Physics Letters A*, vol. 298, pp. 238–242, 2002.
- [7] K.-W. Wong, "A combined chaotic cryptographic and hashing scheme," *Physics Letters A*, vol. 307, pp. 292–298, 2003.
- [8] G. Tang, S. Wang, and H. L., "Chaos-based cryptograph incorporated with s-box algebraic operation," *Physics Letters A*, vol. 318, pp. 388–398, 2003.
- [9] N. K. Pareek, V. Patidar, and K. K. Sud, "Discrete chaotic cryptography using external key," *Physics Letters A*, vol. 309, pp. 75–82, 2003.
- [10] F. Huang and Z.-H. Guan, "Cryptosystem using chaotic keys," *Chaos, Solitons and Fractals*, vol. 23, pp. 851–855, 2005.
- [11] N. K. Pareek, V. Patidar, and K. K. Sud, "Cryptography using multiple one-dimensional chaotic maps," *Communications in Nonlinear Science and Numerical Simulation*, vol. 10, pp. 715–723, 2005.
- [12] N. K. Pareek, V. Patidar, and K. Sud, "Image encryption using chaotic logistic map," *Image and Vision Computing*, vol. 24, no. 9, pp. 926–934, 2006.
- [13] J. Wei, X. Liao, K. Wong, T. Zhou, and Y. Deng, "Analysis and improvement for the performance of baptista's cryptographic scheme," *Physics Letters A*, vol. 354, pp. 101–109, 2006.
- [14] J. Wei, X. Liao, K. Wong, and T. Xiang, "A new chaotic cryptosystem," *Chaos, Solitons and Fractals*, vol. 30, pp. 1143–1152, 2006.
- [15] A. N. Pisarchik, N. J. Flores-Carmona, and M. Carpio-Valadez, "Encryption and decryption of images with chaotic map lattices," *Chaos*, vol. 16, no. 3, p. art. no. 033118, 2006.
- [16] T. Xiang, X. Liao, G. Tang, Y. Chen, and K. wo Wong, "A novel block cryptosystem based on iterating a chaotic map," *Physics Letters A*, vol. 349, pp. 109–115, 2006.

- [17] T. Gao and Z. Chen, "Image encryption based on a new total shuffling algorithm," *Chaos, Solitons and Fractals*, vol. 0, p. doi:10.1016/j.chaos.2006.11.009, 2007.
- [18] T. Gao, Q. Gu, and Z. Chen, "A new image encryption algorithm based on hyper-chaos," *Physics Letters A*, vol. 0, p. doi:10.1016/j.physleta.2007.07.040, 2007.
- [19] Y. Wang, X. Liao, T. Xiang, K.-W. Wong, and D. Yang, "Cryptanalysis and improvement on a block cryptosystem based on iteration a chaotic map," *Physics Letters A*, vol. 363, pp. 277–281, 2007.
- [20] B. W.-K. Ling, C. Y.-F. Ho, and P. K.-S. Tam, "Chaotic filter bank for computer cryptography," *Chaos, Solitons and Fractals*, vol. 34, pp. 817–824, 2007.
- [21] B. Mi, X. Liao, and Y. Chen, "A novel chaotic encryption scheme based on arithmetic coding," Accepted by *Chaos, Solitons and Fractals*, In Press, doi:10.1016/j.chaos.2007.01.133, 2007.
- [22] H. Yang, X. Lia, K. wo Wong, W. Zhang, and P. Wei, "A new cryptosystem based on chaotic map and operations algebraic," Accepted by *Chaos, Solitons and Fractals*, In Press, doi:10.1016/j.chaos.2007.10.046, 2008.
- [23] T. Xiang, S. Wang, H. L., and G. Hu, "A novel symmetrical cryptosystem based on discretized two-dimensional chaotic map," *Physics Letters A*, vol. 364, pp. 252–258, 2007.
- [24] L. P. de Oliveira and M. Sobottka, "Cryptography with chaotic mixing," *Chaos, Solitons and Fractals*, vol. 35, pp. 466–471, 2008.
- [25] X. Wang and Q. Yu, "A block encryption algorithm based on dynamic sequences of multiple chaotic systems," Accepted by *Communications in Nonlinear Science and Numerical Simulation*, In Press, doi:10.1016/j.cnsns.2007.10.011, 2008.
- [26] G. Jakimoski and L. Kocarev, "Analysis of some recently proposed chaos-based encryption algorithms," *Physics Letters A*, vol. 291, no. 6, pp. 381–384, 2001.
- [27] G. Alvarez, F. Montoya, M. Romera, and G. Pastor, "Cryptanalysis of an ergodic chaotic cipher," *Physics Letters A*, vol. 311, pp. 172–179, 2003.
- [28] G. Álvarez, F. Montoya, and G. Pastor, "Cryptanalysis of a discrete chaotic cryptosystem using external key," *Physics Letters A*, vol. 319, pp. 334–339, 2003.
- [29] G. Álvarez, F. Montoya, M. Romera, and G. Pastor, "Keystream cryptanalysis of a chaotic cryptographic method," *Comput. Phys. Comm.*, vol. 156, pp. 205–207, 2004.
- [30] G. Alvarez, F. Montoya, M. Romera, and G. Pastor, "Cryptanalysis of dynamic look-up table based chaotic cryptosystems," *Physics Letters A*, vol. 326, pp. 211–218, 2004.
- [31] S. Li, G. Chen, K.-W. Wong, X. Mou, and Y. Cai, "Baptista-type chaotic cryptosystems: problems and countermeasures," *Physics Letters A*, vol. 332, pp. 368–375, 2004.
- [32] C. Li, S. Li, G. Alvarez, G. Chen, and K.-T. Lo, "Cryptanalysis of two chaotic encryption schemes based on circular bit shift and xor operations," *Physics Letters A*, vol. 369, pp. 23–30, 2007.
- [33] D. Arroyo, C. Li, S. Li, and G. Alvarez, "Cryptanalysis of a computer cryptography scheme based on a filter bank," p. In Press, accepted by *Chaos, Solitons and Fractals* in January 2008.
- [34] G. Alvarez, D. Arroyo, and J. Nunez, "Application of gray code to the cryptanalysis of chaotic cryptosystems," in *3rd International IEEE Scientific Conference on Physics and Control (PhysCon'2007, 3rd - 7th, September 2007, Potsdam, Germany)*. Potsdam, Germany: IEEE IPACS, 3rd - 7th, September 2007.
- [35] A. Skrobek, "Approximation of a chaotic orbit as a cryptanalytical method on baptista's cipher," accepted by *Physics Letters A*, In Press, doi:10.1016/j.physleta.2007.08.041, 2007.
- [36] A. Menezes, P. van Oorschot, and S. Vanstone, *Handbook of Applied Cryptography*. CRC Press, 1997.
- [37] S. Wiggins, *Introduction to Applied Nonlinear Dynamical Systems and Chaos*. Springer-Verlag, New York, 1990.
- [38] G. Pastor, M. Romera, and F. Montoya, "A revision of the Lyapunov exponent in 1D quadratic maps," *Physica D*, vol. 107, pp. 17–22, 1997.
- [39] R. Steuer, L. Molgedey, W. Ebeling, and M. J.-M. no, "Entropy and optimal partition for data analysis," *The European Physical Journal B*, vol. 19, pp. 265–269, 2001.
- [40] O. Rosso, S. Blanco, J. Yordanova, V. Kolev, A. Figliola, M. Schrmann, and E. Basar, "Wavelet entropy: a new tool for ananlysis of short duration brain electrical signals," *Journal of Neuroscience Methods*, vol. 105, pp. 65–75, 2001.
- [41] J. Amigó, L. Kocarev, and I. Tomovski, "Discrete entropy," *Physica D*, vol. 228, pp. 77–85, 2007.
- [42] G. Alvarez and S. Li, "Some basic cryptographic requirements for chaos-based cryptosystems," *Int. J. Bifurc. Chaos*, vol. 16, no. 8, pp. 2129–2151, 2006.
- [43] S. Li, G. Chen, and X. Mou, "On the dynamical degradation of digital piecewise linear chaotic maps," *Int. J. Bifurc. Chaos*, vol. 15, no. 10, pp. 3119–3151, 2005.
- [44] G. Alvarez, F. Montoya, M. Romera, and G. Pastor, "Cryptanalysis of a chaotic encryption system," *Physics Letters A*, vol. 276, pp. 191–196, 2000.
- [45] E. Alvarez, A. Fernández, P. García, J. Jim'enez, and A. Marcano, "New approach to chaotic encryption," *Physics Letters A*, vol. 263, pp. 373–375, 1999.
- [46] N. Metropolis, M. Stein, and P. Stein, "On the limit sets for transformations on the unit interval," *Journal of Combinatorial Theory (A)*, vol. 15, pp. 25–44, 1973.
- [47] X. Wu, H. Hu, and B. Zhang, "Parameter estimation only from the symbolic sequences generated by chaos system," *Chaos, solitons and Fractals*, vol. 22, pp. 359–366, 2004.
- [48] M. Martin, A. Plastino, and O. Rosso, "Generalized statistical complexity measures: Geometrical and analytical properties," *Physica A: Statistical Mechanics and its Applications*, vol. 369, no. 2, pp. 439–462, 2006.